



SALIENT FEATURES

- Universal input selectability by user on field.
- User friendly calibration through front keypad.
- Individual alarm outputs for each channel one high/low with programmable hysteresis.
- Long lasting battery backup for memory.
- Cold junction compensation for TC input.
- PC Communication (MODBUS RTU protocol).
- Parallel Printer Port.



DESCRIPTION

The new series of SC-204 from ELECTRONET is unique micro-controller based universal input process scanner is in most miniature size with multiple features. SC-204 is a blend of flexibility and versatility. Which can accept the universal input and display its processed value with optional alarm settings and communication port. All operating parameters are programmable through front membrane keypad.

TECHNICAL SPECIFICATIONS

No of Channels	: Min. 8 Nos. - Max. 16 Nos.
Input	: Universal (RTD, Thermocouple, Current, Voltage)
Display	: 4 Digit, 0.5", 7 Segment Red LED for Process Variable & 2 Digit, for Channel Number.
Range	: Programmable from (-) 9999 to (+) 9999 from front keypad
Alarm Output	: Potential free Relay contacts - 1 c/o, 1 Amp @ 230 V AC for High & Low
Accuracy	: Better than $\pm 0.25\%$ F.S., ± 1 digit
Retransmission Output	: 4 - 20 mA DC, Isolated for each channel
Communication Port	: RS 485 / RS 232 with MODBUS RTU Protocol
Printer Port	: 80 Column Parallel Printer output
Temperature Drift	: Less than 0.01% of F.S. per $^{\circ}\text{C}$ change
Transmitter Supply	: 24 V DC, 30 mA
Mains Supply	: 230 / 110 / 24 V AC, 50 Hz single phase $\pm 10\%$
Power Consumption	: 10 Watts max
Display Scan Time	: Programmable from 1 to 99 seconds
Enclosure	: Sheet steel, powder coated
Dimensions	: 1) 96 (H) x 192 (W) x 300 mm (D) max. 2) 192 x 192 x 300 mm (D) max. (For built-in Individual Alarm Or Retransmission Output)
Mounting	: Flush of the Panel
Weight	: 6Kg. (Approx.)
Operating Temperature	: 0 - 55 $^{\circ}\text{C}$
Humidity	: 10 to 90% non condensing

CODIFICATION FOR SC 204

CODE INPUT (UNIVERSAL)
 01 : RTD Pt 100
 02 : Thermocouple,(J,K,R,S,B,T,E)
 03 : 4 - 20 mA / 0 - 20 mA
 04 : 0 - 5 VDC / 0 - 10 VDC

CODE NUMBER OF CHANNELS
 01 : 08 NOS.
 02 : 16 NOS.

CODE PARALLEL PRINTER OUTPUT
 01 : NONE
 02 : REQUIRED

CODE ALARM OUTPUT
 01 : NONE
 02 : INDIVIDUAL HIGH
 02 : INDIVIDUAL LOW
 03 : INDIVIDUAL HIGH & LOW

CODE RETRANSMISSION OUTPUT
 00 : NONE
 01 : 4 TO 20 MA DC ISOLATED
 02 : OTHER (PL. SPECIFY)

CODE COMMUNICATION PORT
 00 : NONE
 01 : RS 232
 02 : RS 485

SC 204

01

02

01


03

02

02

SAMPLE MODEL NUMBER

MOUNTING DETAILS

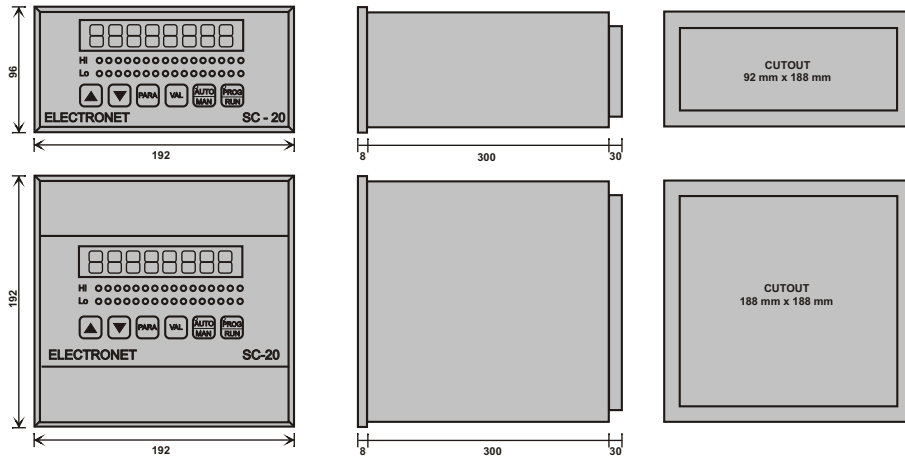

Due to our continuous product revisions, Design, Specifications and Model Numbers are subject to change without notice.

MANUFACTURED & MARKETED BY

ELECTRONET EQUIPMENTS PVT. LTD
 PROCESS CONTROL INSTRUMENTS & AUTOMATION

Plot No 85 & 86, Tiny Industrial Estate, Kondhwa Bk.

Pune - 411 048, Maharashtra, India

Telefax: +91 20 2693 4122 / 1476

E-mail: elecnet@vsnl.com / eeplsales@dataone.in

Web: www.electronetequipments.com

REP BY: